

CS-TB-EU

4CH 1080p Analog DVR with 2 Analog Bullet Cameras

Component







CS-X5-104T-EU(1TB HDD)



CS-C3T-1R(2.8mm)

Dimension

HOMEsec.nl
Woonhuisbeveiliging via smartphone of tablet

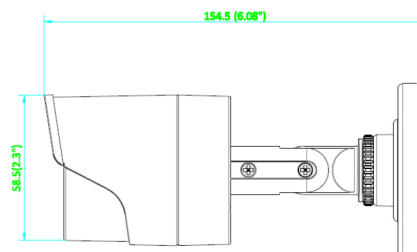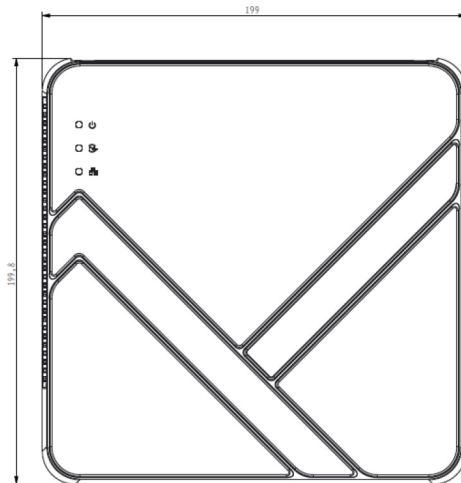

Number		Item	Quantity	Unit	Item image (For only reference)
DVR	1	4 CH DVR Model: CS-X5-104T-EU (1TB HDD)	1	PCS	
	2	HDMI Cable (19P/M to 19P/M,200cm,Black)	1	PCS	
	3	Power Adapter (ADS-25FSG-1212018GPG, ,European StandardD,12V1.5A,Φ2.1)	1	PCS	
	4	Ethernet Cable (RJ45 to RJ45,Cat5e UTP,CCA,1m)	1	PCS	
	5	Mouse 800dpi,USB,5V,1.5m	1	PCS	

Camera	6	Camera Model: CS-C3T-1R (2.8mm)	2	PCS	
	7	Power +Video Cable (BNC+DC/M to BNC+DC/F,1800cm,Black)	2	PCS	
	8	Mounting Screws and Plugs (3_PA4×25-SUS)	2	PCS	
	9	Mounting Templates	2	PCS	
	10	Power Adapter (ADS-25FSG-1212018GPG, European Standard,12V1.5A,Φ2.1)	1	PCS	
	11	2Channels DC Power Cord (DC/M to 4*DC/F,20cm,Bla,Black,SWANN custom-made	1	PCS	
	12	Isolated Power Module (DC5.5*2.1 to DC5.5*2.1,10cm,Black, custom-made)	2	PCS	
Accessories	13	Dustproof Bag (place A4 paper)	1	PCS	/
	14	Warning Decal (Europe)	4	PCS	
	15	Quick Start Guide	1	PCS	/
	16	Installation Guide	1	PCS	/
	17	Warranty Card	1	PCS	/

CS-X5-104T-EU

4CH 1080p Analog DVR with 1TB HDD



Introduction


The CS-X5-104T-EU DVR (Digital Video Recorder) connects to cameras through coaxial cables and the recorder supports legacy analog cameras in addition to our 720p and 1080p cameras. Once the cameras are connected, the plug-and-play feature enables the recorder to start displaying and recording the video. Most tasks, from the initial setup to daily operation, can be accomplished through our app. The system comes with a built-in WD Purple hard drive, the first choice for professional surveillance systems.

Main Features

-  Simultaneous HDMI and VGA outputs at up to 1920×1080 resolution
-  Instant playback for assigned camera in multi-channel live view mode
-  Support synchronous playback and reverse playback for multi-channel
-  1 self-adaptive 10M/100M network interface is provided
-  Compatible with HD-TVI and analog cameras
-  Support smart search
-  Built-in 1-TB HDD
-  Free EZVIZ Cloud P2P

Physical Interfaces:

- 1 VIDEO IN
- 2 AUDIO IN, RCA Connector
- 3 AUDIO OUT, RCA Connector
- 4 VGA Interface
- 5 HDMI Interface
- 6 USB Port
- 7 LAN Network Interface
- 8 12VDC Power Input

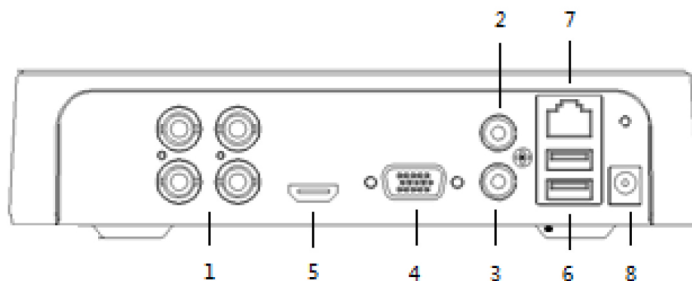

Specifications

Model	CS-X5-104T-EU	
Video/Audio input	Video compression	H.264
	Analog and HD-TVI video input	4-ch BNC interface (1.0Vp-p, 75 Ω)
	Supported camera types	720P/25, 720P/30, 720P/50, 720P/60, 1080P/25, 1080P/30, CVBS
	Audio compression	G.711u
	Audio input / Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Video/Audio output	HDMI / VGA output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
	Encoding resolution	Main stream: 1080P(15FPS) / 720P / 4CIF
		Sub-stream: 4CIF/ VGA/CIF
	Frame rate	Main stream: 1/16 fps ~ Real time frame rate
		Sub-stream: 1/16 fps ~ Real time frame rate
	Video bitrate	32 Kbps-6 Mbps
	Audio output	1-ch, RCA (Linear, 1KΩ)
	Audio bitrate	64 Kbps
	Dual-stream	Support
Network management	Stream type	Video, Video & Audio
	Synchronous playback	4-ch
	Playback resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
	Network protocols	EZVIZ Cloud P2P
Hard disk	Capacity	Built-in 1-TB HDD
External interface	Network interface	1; 10M / 100M self-adaptive Ethernet interface
	Serial interface	1; standard RS-485 serial interface, half-duplex
	USB port	2 × USB2.0
General	Power supply	12V DC
	Consumption	≤ 20W
	Working temperature	14 °F ~ 131 °F(-10 °C ~+55 °C)
	Working humidity	10% ~ 90%
	Chassis	Mini DVR chassis
	Dimensions (W × D × H)	7.9 × 7.9 × 1.8 inch(200 × 200 × 45mm)
	Weight	2.2 lb (1kg)

CS-C3T-1R

720p Weatherproof Analog Bullet Camera



Main Features

-  HD output, up to 720P resolution
-  True Day/Night, Smart IR
Up to 65 feet IR distance
-  IP66 weatherproof
-  Free EZVIZ Cloud P2P

Specifications

Model	CS-C3T-1R
Camera	
Image Sensor	1MP CMOS Image Sensor
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	2.8mm View Angle: 92°(horizontal)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	>62dB
General	
Working Temperature/Humidity	-40 °F to 140 °F (-40 °C to 60 °C) Humidity 90% or less (non-condensing)
Power Supply	12V DC ± 15%
Power Consumption	Maximum. 4W
Weather Proof Ratings	IP66
IR Range	Up to 65 feet (20m)
Dimension	Φ2.75" ×6.20"(Φ70×157.4 mm)
Weight	0.73 lb (330 g)